

Beljn

12x24 Porcelain

mosaic 
Products. Design. Solutions.



03BJN011224



03BJN021224



03BJN031224




2x2 Mosaic



2x6 Brick Mosaic



03BJN041224

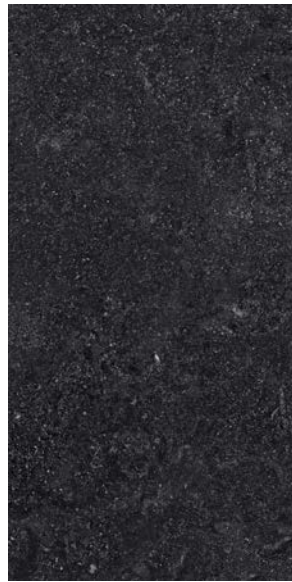

03BJN051224



Beljn UPS features silky smooth to the touch FeatherSoft® technology that combines comfort with practical slip resistance.

Tile: 12x24 - 24x24 - 24x48

Mosaics: 2x2 - 2x6 Brick

Trim: 4x24 Bullnose - 6x12 Cove Base

Not all colors available in all finishes

For more information
and images:



Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648	> 450 lbf
Bond Strength	ASTM C482	> 200 psi
Chemical Resistance	ASTM C650	Unaffected
Frost Resistance	ASTM C1026	Resistant
Water Absorption	ASTM C373	< 0.50%
Scratch Hardness	Mohs Scale	7
DCOF	ANSI A326.3	0.50-0.60 (Unpolished); 0.60-0.70 (Textured Exterior)

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.85" x 23.5"	9.5 mm	Unpolished	Yes
24" x 24"	23.5" x 23.5"	9.5 mm	Unpolished	Yes
24" x 48"	23.5" x 47.13"	10.5 mm	Unpolished or Textured Exterior	Yes
2" x 2" Stacked Mosaic	11.85" x 11.85"	9.5 mm	Unpolished	-
2" x 6" Brick Mosaic	11.69" x 14.70"	9.5 mm	Unpolished	-
4" x 24" Bullnose	3.82" x 23.5"	9.5 mm	Unpolished	-
6" x 12" Cove Base	5.91" x 11.69"	9.5 mm	Unpolished	-

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.

