

Norian

12x24 Glazed Porcelain

mosaic 
Products. Design. Solutions.



18x48 Doghe Wall Decor
(Matte)



45NORIVO1224 (natural)
45NORIVO1224P (polished)




45NORSAN1224 (natural)
45NORSAN1224P (polished)



45NORFEN1224 (natural)
45NORFEN122P (polished)



45NORASH1224 (natural)
45NORASH1224P (polished)

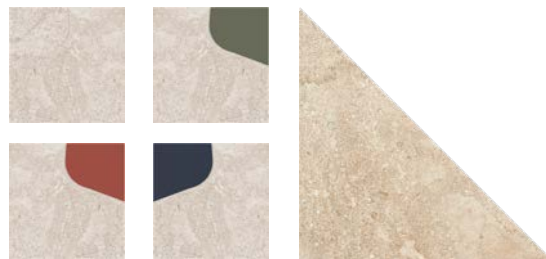

6x6 Module
(matte)



Triangle
(natural or pol.)



2x2 Mosaic
(natural or pol.)



Stripe Mosaic
(natural or pol.)



Tile: 6x6 - 12x16 Triangle - 12x24 - 24x48
Wall Tile: 18x48 Doghe
Mosaics: 2x2 - 12x12 Stripe
Trim: 3x12 Bullnose

For more information
and images:



Technical Characteristics

Test Item	Test Method	Test Result
Freeze Resistance	ASTM C1026	Resistant
Water Absorption	ASTM C373	≤ 0.5%
Stain Resistance	ASTM C1378	Class A (natural); Class E (polished)
DCOF	ASTM C1028	≥ 0.60 (natural) < 0.42 (polished)
Chemical Resistance	ASTM C650-04	Class A (natural); Class E (polished)
Breaking Strength	ASTM C648	≥ 275 lbf
Mohs Hardness	Mohs	8 (natural); 6 (polished)

Nominal Size	Actual Size	Thickness	Rectified	Finish
6" x 6"	5.91" x 5.91"	8 mm	Yes	Natural
12" x 16" Triangle	11.65" x 16.48"	8 mm	Yes	Natural or Polished
12" x 24"	11.70" x 23.50"	8 mm	Yes	Natural or Polished
18" x 48" Wall	17.66" x 47.19"	13.3 mm	Yes	Matte
24" x 48"	23.50" x 47.13"	10 mm	Yes	Natural or Polished
1" x 6" Stripe Mosaic	11.77" x 11.77"	8 mm	Yes	Natural or Polished
2" x 2" Mosaic	11.73" x 11.73"	8 mm	Yes	Natural or Polished
3" x 12" Bullnose	2.75" x 11.65"	8 mm	Yes	Natural or Polished

Values reflect an average among tests performed in the manufacturer's laboratory according to the standard requirements and/or through a third party laboratory. Tests are performed on actual production, first choice material. Values may vary between single individual production runs.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.