


# Carenza


12x24 Porcelain



75CARBIA1224 (matte)  
75CARBIA1224P (polished)

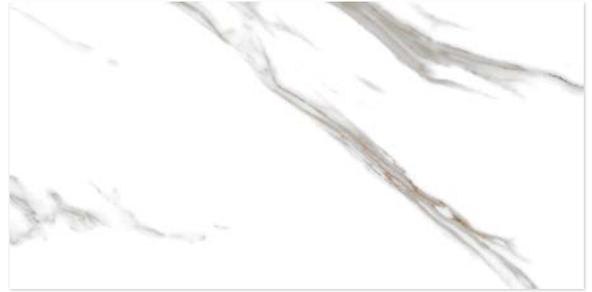


75CARORO1224 (matte)  
75CARORO1224P (polished)



1x3 Herringbone



2x2 Mosaic

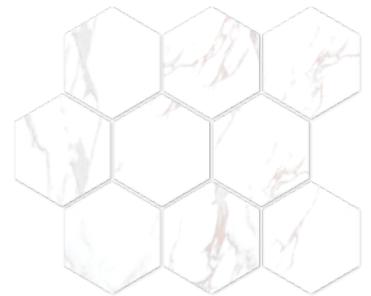

4" Hexagon



### QuickSHIP

Tile: 12x24 - 24x48

Mosaic: 1x3 Herringbone - 2x2

*Non-QuickSHIP items are available for commercial projects only. Inquire with a sales representative for additional information.*

Tile: 24x24

Mosaic: 4" Hexagon

Trim: 4x12 Bullnose

*Not all colors available in all sizes or finishes*

For more information  
and images:



## Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648	≥ 425 lbs.
Scratch Hardness	MOH'S	7 (Matte); 4-5 (Polished)
Chemical Resistance	ASTM C650-04	Class A (Matte); E (Pol.)
Abrasion Resistance	ASTM C1027	Class III
Thermal Shock Resistance	ASTM C484	Resistant
Frost Resistance	ASTM C1026	Resistant
Water Absorption	ASTM C373	< 0.5%
DCOF (Wet)	ASTM C1028	≥ 0.42 (Matte)
Category of Use	ANSI A326.3	IW (Matte); ID (Polished)

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11-3/4" x 23-9/16"	9.0 mm	Matte or Polished	Yes
24" x 24"	23-9/16" x 23-9/16"	9.0 mm	Matte or Polished	Yes
24" x 48"	23-9/16" x 47-5/16"	9.0 mm	Matte or Polished	Yes
1" x 3" Herringbone Mosaic	12-1/8" x 11-9/16"	9.0 mm	Matte or Polished	-
2" x 2" Mosaic	11-3/4" x 11-3/4"	9.0 mm	Matte	-
4" Hexagon Mosaic	11-3/4" x 11-3/4"	9.0 mm	Matte	-
4" x 12" Bullnose	4" x 11-3/4"	9.0 mm	Matte or *Polished	-

\*Due to the nature of the manufacturing process, it is not possible to guarantee the same level of polish on bullnose as the field tile.

All tile is subject to variations in technical specifications and performance due to the inherent variables in the raw materials and production process. It is understood that test results on a particular product may vary slightly from tile to tile and from test to test. Test results are not guarantees of minimum or maximum thresholds of performance.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.



Due to the nature of this tile's coloration, the veins may appear darker when viewed from certain angles.



For your convenience, select products are stocked in our Central Service Center.