

Classica

12x24 Porcelain

mosaic 
Products. Design. Solutions.



75CLACRE1224 (matte)
75CLACRE1224P (polished)



75CLAGRI1224 (matte)
75CLAGRI1224P (polished)




75CLACRE1214C



75CLAGRI1214C



75CLACRE2M

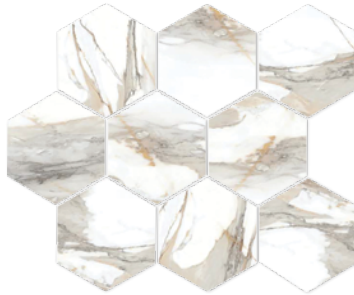

75CLACRE4H



75CLAGRI2M



75CLAGRI4H



QuickSHIP

Tile: 12x24

Mosaic: 2x2 (CRE only)

Non-QuickSHIP items are available for commercial projects only. Inquire with a sales representative for additional information.

Tile: 24x48

Mosaics: 2x2 - 4" Chevron - 4" Hexagon

Trim: 3x12 Bullnose

For more information and images:



Technical Characteristics

| Test Item | Test Method | Test Result |
|--------------------------|--------------|---------------------------|
| Breaking Strength | ASTM C648 | ≥ 425 lbs. |
| Scratch Hardness | MOH'S | 7 (Matte); 4-5 (Polished) |
| Chemical Resistance | ASTM C650-04 | Class E |
| Abrasion Resistance | ASTM C1027 | Class III |
| Thermal Shock Resistance | ASTM C484 | Resistant |
| Frost Resistance | ASTM C1026 | Resistant |
| Water Absorption | ASTM C373 | < 0.5% |
| DCOF (Wet) | ASTM C1028 | ≥ 0.42 (Matte) |
| Category of Use | ANSI A326.3 | IW (Matte); ID (Polished) |

| Nominal Size | Actual Size | Thickness | Finish | Rectified |
|-------------------|----------------------|-----------|--------------------|-----------|
| 12" x 24" | 11-3/4" x 23-9/16" | 9.0 mm | Matte or Polished | Yes |
| 24" x 48" | 23-9/16" x 47-5/16" | 9.0 mm | Matte or Polished | Yes |
| 2" x 2" Mosaic | 11-3/4" x 11-3/4" | 9.0 mm | Matte | - |
| 4" Chevron Mosaic | 11-37/64" x 14-7/32" | 9.0 mm | Matte | - |
| 4" Hexagon Mosaic | 11-3/4" x 11-3/4" | 9.0 mm | Matte | - |
| 3" x 12" Bullnose | 2-3/4" x 11-3/4" | 9.0 mm | Matte or *Polished | - |

*Due to the nature of the manufacturing process, it is not possible to guarantee the same level of polish on bullnose as the field tile.

All tile is subject to variations in technical specifications and performance due to the inherent variables in the raw materials and production process. It is understood that test results on a particular product may vary slightly from tile to tile and from test to test. Test results are not guarantees of minimum or maximum thresholds of performance.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.