


Tuxedo


12x24 Porcelain



75TUXBLA1224 (matte)
75TUXBLA1224P (polished)




Black & White 2x2 Mosaic




2x2 Mosaic



75ARCWHI12 / 75TUXBLA12
Optional checkerboard - pair with Arctic Style

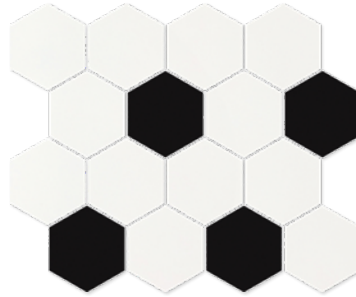

Black & White Hexagon Mosaic

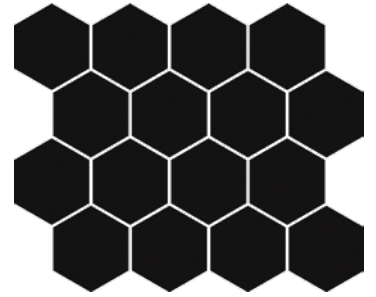

Hexagon Mosaic



Black & White Diamond Mosaic



Diamond Mosaic



Shown with
Arctic Style

Tile: 12x12 - 12x24 - 24x24 - 24x48
Mosaics: 2x2 - 3" Hexagon - 11x12 Diamond
Trim: 4x24 Bullnose

For more information
and images:





Technical Characteristics

Test Item	Test Method	Test Result	
		Matte	Polished
Breaking Strength	ASTM C648	≥ 325 lbs.	
Scratch Hardness	MOH'S	4 - 5	7
Chemical Resistance	ASTM C650-04	Class C	Class A
Abrasion Resistance	ASTM C1027	Class III	Class A
Thermal Shock Resistance	ASTM C484	Resistant	
Frost Resistance	ASTM C1026	Resistant	
Water Absorption	ASTM C373	≤ 0.5%	
DCOF (Wet)	ASTM C1028	≥ 0.42	
Category of Use	ANSI A326.3	ID	IW

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 12"	11.62" x 11.62"	9.0 mm	Matte or Polished	Yes
12" x 24"	11.75" x 23.56"	9.0 mm	Matte or Polished	Yes
24" x 24"	23.56" x 23.56"	9.0 mm	Matte or Polished	Yes
24" x 48"	23.56" x 47.56"	9.0 mm	Matte or Polished	Yes
2x2 Mosaic	11.75" x 11.75"	9.0 mm	Matte or Polished	-
3" Hexgaon Mosaic	10.12" x 11.62"	9.0 mm	Matte or Polished	-
11x12 Diamond Mosaic	10.56 x 11.75"	9.0 mm	Matte or Polished	-
4" x 24" Bullnose	4" x 23.56"	9.0 mm	Matte or Polished	-

All tile is subject to variations in technical specifications and performance due to the inherent variables in the raw materials and production process. It is understood that test results on a particular product may vary slightly from tile to tile and from test to test. Test results are not guarantees of minimum or maximum thresholds of performance.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.