

Argent 2.0

12x24 Porcelain

mosaic 
Products. Design. Solutions.



03ARG011224



03ARG151224




03ARG171224




03ARG381224



03ARG181224




03ARG201224




03ARG321224




03ARG311224



03ARG361224



03ARG351224



03ARG341224




03ARG371224



03ARG331224



03ARG101224



03ARG091224



03ARG051224



03ARG121224




03ARG161224



2x2 Mosaic



4x4 Random Angle
Mosaic

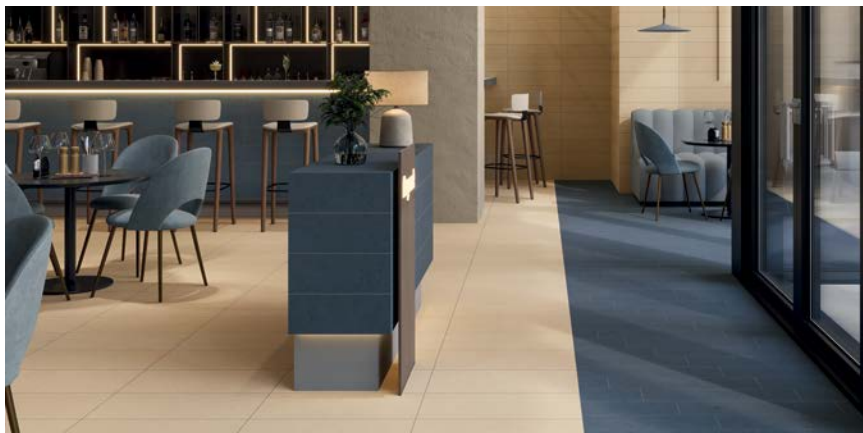

Tile: 6x24 - 12x12 - 12x24

Mosaic: 2x2 - 4x4 Random Angle

Trim: 4x24 Bullnose - 6x12 Cove Base

Not all colors available in all sizes

*For more information
and images:*



Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648	≥ 450 lbf
Bond Strength	ASTM C482	≥ 200 psi
Chemical Resistance	ASTM C650	Unaffected
Frost Resistance	ASTM C1026	Resistant
Water Absorption	ASTM C373	< 0.50%
Scratch Hardness	Mohs Scale	7
DCOF	AcuTest	0.50-0.60

Nominal Size	Actual Size	Thickness	Finish	Rectified
6" x 24"	5.79" x 23.50"	9.5 mm	Unpolished	Yes
12" x 12"	11.69" x 11.69"	9.5 mm	Unpolished	Yes
12" x 24"	11.69" x 23.50"	9.5 mm	Unpolished	Yes
2" x 2" Mosaic	11.73" x 11.73"	9.5 mm	Unpolished	-
4" x 4" Random Angle	11.73" x 11.73"	9.5 mm	Unpolished	-
4" x 24" Bullnose	3.78" x 23.50"	9.5 mm	Unpolished	-
6" x 12" Cove Base	5.79" x 11.77"	9.5 mm	Unpolished	-

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.

